



SUBMITTAL

JOB: _____	REPRESENTATIVE: _____
_____	ORDER NO: _____ DATE: _____
ENGINEER: _____	SUBMITTED BY: _____ DATE: _____
CONTRACTOR: _____	APPROVED BY: _____ DATE: _____

MODEL NUMBER	CONNECTION SIZES 125 lb. A.S.A. FLANGED		QUANTITY REQUIRED	IDENTIFICATION
	INLET FROM SYSTEM	OUTLET TO PUMP		

MATERIALS OF CONSTRUCTION	
Body	Cast Iron
Strainer	Stainless Steel, 0.125" (3mm) Perf.
Start-Up Strainer (remove after 1week)	Fine Mesh Galvanized Steel
Guide Vanes	Cast Iron

MAXIMUM WORKING PRESSURE: 175 psig (12 bars)
MAXIMUM OPERATING TEMPERATURE: 300°F (150°C)
OPTIONS:


PERFORMANCE DATA

MODEL	Velocity in feet per second (m/s)							
	ft (m) @	3 (0.91)	4 (1.22)	5 (1.52)	6 (1.83)	8 (2.44)	10 (3.05)	12 (3.66)
	Usgpm (l/s)	Pressure Drop in Feet (m) of Water @ Flow in USgpm (l/s)						
SG-215	ft (m) @	0.05 (0.02)	0.08 (0.02)	0.13 (0.04)	0.19 (0.06)	0.35 (0.11)	0.52 (0.16)	0.77 (0.23)
	Usgpm (l/s)	19 (1.2)	25 (1.6)	32 (2.0)	38 (2.4)	52 (3.3)	63 (4.0)	77 (4.9)
SG-22	ft (m) @	0.11 (0.03)	0.20 (0.06)	0.32 (0.10)	0.43 (0.13)	0.80 (0.25)	1.28 (0.40)	1.72 (0.54)
	Usgpm (l/s)	32 (2.0)	43 (2.7)	54 (3.4)	64 (4.0)	86 (5.4)	108 (6.8)	128 (8.1)
SG-252	ft (m) @	0.18 (0.05)	0.32 (0.10)	0.50 (0.15)	0.72 (0.22)	1.28 (0.39)	2.00 (0.61)	2.88 (0.88)
	Usgpm (l/s)	45 (2.8)	50 (3.2)	75 (4.7)	90 (5.7)	120 (7.6)	150 (9.5)	180 (11.4)
SG-32	ft (m) @	0.20 (0.06)	0.35 (0.11)	0.55 (0.17)	0.80 (0.24)	1.42 (0.43)	2.20 (0.67)	3.15 (0.96)
	Usgpm (l/s)	70 (4.4)	92 (5.8)	115 (7.3)	138 (8.7)	185 (11.7)	230 (14.5)	276 (17.4)
SG-44	ft (m) @	0.17 (0.05)	0.29 (0.09)	0.47 (0.14)	0.68 (0.21)	1.20 (0.37)	1.90 (0.58)	2.75 (0.84)
	Usgpm (l/s)	118 (7.4)	155 (9.8)	198 (12.5)	238 (15.0)	315 (19.9)	396 (25.0)	475 (30.0)
SG-55	ft (m) @	0.23 (0.07)	0.41 (0.13)	0.67 (0.20)	0.95 (0.29)	1.70 (0.52)	2.65 (0.81)	3.80 (1.16)
	Usgpm (l/s)	187 (11.8)	250 (15.8)	315 (19.9)	375 (23.7)	500 (31.5)	625 (39.4)	750 (47.3)
SG-65	ft (m) @	0.22 (0.07)	0.38 (0.12)	0.60 (0.18)	0.86 (0.26)	1.54 (0.47)	2.40 (0.73)	3.45 (1.05)
	Usgpm (l/s)	270 (17.0)	360 (22.7)	450 (28.4)	540 (34.1)	720 (45.4)	900 (56.8)	1080 (68.1)
SG-66	ft (m) @	0.21 (0.06)	0.37 (0.11)	0.58 (0.18)	0.85 (0.26)	1.50 (0.46)	2.30 (0.70)	3.35 (1.02)
	Usgpm (l/s)	470 (29.7)	625 (39.4)	780 (49.2)	940 (59.3)	1250 (78.9)	1550 (97.8)	1870 (118.0)
SG-88	ft (m) @	0.26 (0.08)	0.46 (0.14)	0.73 (0.22)	1.03 (0.31)	1.85 (0.56)	2.92 (0.89)	4.20 (1.28)
	Usgpm (l/s)	740 (46.7)	980 (61.8)	1230 (77.6)	1480 (93.4)	1960 (123.7)	2450 (154.6)	2940 (185.5)
SG-1010	ft (m) @	0.25 (0.08)	0.44 (0.13)	0.72 (0.22)	1.02 (0.31)	1.81 (0.55)	2.80 (0.85)	4.00 (1.22)
	Usgpm (l/s)	1080 (68.1)	1400 (88.3)	1750 (110.4)	2100 (132.5)	2800 (176.7)	3500 (220.8)	4200 (265.0)
SG-1210	ft (m) @	0.28 (0.09)	0.58 (0.18)	0.92 (0.28)	1.23 (0.38)	2.13 (0.65)	3.50 (1.07)	5.30 (1.62)
	Usgpm (l/s)	1440 (90.9)	1920 (121.1)	2400 (151.4)	2880 (181.7)	3840 (242.3)	4800 (302.8)	5760 (363.4)
SG-1412	ft (m) @	0.28 (0.09)	0.58 (0.18)	0.92 (0.28)	1.23 (0.38)	2.13 (0.65)	3.50 (1.07)	5.30 (1.62)
	Usgpm (l/s)	1440 (90.9)	1920 (121.1)	2400 (151.4)	2880 (181.7)	3840 (242.3)	4800 (302.8)	5760 (363.4)
SG-1414	ft (m) @	0.28 (0.09)	0.58 (0.18)	0.92 (0.28)	1.23 (0.38)	2.13 (0.65)	3.50 (1.07)	5.30 (1.62)
	Usgpm (l/s)	1440 (90.9)	1920 (121.1)	2400 (151.4)	2880 (181.7)	3840 (242.3)	4800 (302.8)	5760 (363.4)
SG-1614	ft (m) @	0.28 (0.09)	0.58 (0.18)	0.92 (0.28)	1.23 (0.38)	2.13 (0.65)	3.50 (1.07)	5.30 (1.62)
	Usgpm (l/s)	1440 (90.9)	1920 (121.1)	2400 (151.4)	2880 (181.7)	3840 (242.3)	4800 (302.8)	5760 (363.4)


DIMENSIONAL DATA SG

MODEL	Connection Size		Strainer Free Sq. ins (Sq. cm)	DIMENSIONS in Inches (mm)										Weight lbs (kg)
	System	Pump		A	B	C	D	E	F	G	H	I	J	
SG-215	2 (51)	1.5 (38)	34 (222)	4.50 (114)	3.07 (78)	8.63 (219)	12.63 (321)	9.84 (250)	0.50 (13)	4.75 (121)	1.00 (25)	6.00 (152)	5.00 (127)	31 (14.1)
SG-22	2 (51)	2 (51)	34 (222)	4.50 (114)	3.07 (78)	4.50 (114)	8.50 (216)	5.71 (145)	0.50 (13)	4.75 (121)	1.00 (25)	6.00 (152)	6.00 (152)	26 (11.8)
SG-252	2.5 (64)	2 (51)	34 (222)	5.00 (127)	3.07 (78)	4.50 (114)	8.50 (216)	5.71 (145)	0.50 (13)	4.75 (121)	1.00 (25)	7.00 (178)	6.00 (152)	29 (13.2)
SG-32	3 (76)	2 (51)	34 (222)	5.50 (140)	3.07 (78)	4.50 (114)	8.50 (216)	5.71 (145)	0.50 (13)	4.75 (121)	1.00 (25)	7.50 (191)	6.00 (152)	31 (14.1)
SG-2525	2.5 (64)	2.5 (64)	34 (222)	4.90 (124)	3.07 (78)	4.90 (124)	7.50 (191)	5.86 (149)	0.50 (13)	4.75 (121)	1.00 (25)	7.12 (181)	7.12 (181)	34 (15.4)
SG-325	3 (76)	2.5 (64)	34 (222)	5.50 (140)	3.07 (78)	4.90 (124)	7.50 (191)	5.86 (149)	0.50 (13)	4.75 (121)	1.00 (25)	7.50 (191)	7.12 (181)	35 (15.9)
SG-33	3 (76)	3 (76)	44 (282)	5.40 (137)	3.63 (92)	5.40 (137)	9.88 (251)	7.00 (178)	0.75 (19)	5.50 (140)	1.00 (25)	7.81 (198)	7.81 (198)	45 (20.4)
SG-43	4 (102)	3 (76)	44 (282)	6.50 (165)	3.63 (92)	5.90 (150)	10.38 (264)	7.50 (191)	0.75 (19)	5.50 (140)	1.00 (25)	9.00 (229)	7.81 (198)	53 (24.0)
SG-44	4 (102)	4 (102)	79 (511)	6.50 (165)	4.19 (106)	6.50 (165)	11.75 (298)	8.13 (206)	0.75 (19)	7.00 (178)	1.25 (32)	9.00 (229)	9.00 (229)	72 (32.7)
SG-54	5 (127)	4 (102)	79 (511)	7.44 (189)	4.19 (106)	6.50 (165)	11.75 (298)	8.13 (206)	0.75 (19)	7.00 (178)	1.25 (32)	10.00 (254)	9.00 (229)	79 (35.8)
SG-64	6 (152)	4 (102)	79 (511)	8.03 (204)	4.19 (106)	7.50 (191)	12.75 (324)	9.13 (232)	0.75 (19)	7.00 (178)	1.25 (32)	11.00 (279)	9.00 (229)	87 (39.5)
SG-55	5 (127)	5 (127)	111 (719)	7.47 (190)	4.81 (122)	7.47 (190)	13.50 (343)	9.47 (241)	1.00 (25)	8.00 (203)	1.25 (32)	10.00 (254)	10.00 (254)	99 (44.9)
SG-65	6 (152)	5 (127)	111 (719)	8.00 (203)	4.81 (122)	7.47 (190)	13.50 (343)	9.47 (241)	1.00 (25)	8.00 (203)	1.25 (32)	11.15 (283)	10.00 (254)	103 (46.7)
SG-66	6 (152)	6 (152)	120 (775)	8.00 (203)	5.71 (145)	8.00 (203)	14.75 (375)	10.19 (259)	1.00 (25)	9.25 (235)	2.00 (51)	11.15 (283)	11.15 (283)	141 (63.9)
SG-86	8 (203)	6 (152)	120 (775)	9.00 (229)	5.71 (145)	10.00 (254)	16.75 (425)	12.19 (310)	1.00 (25)	9.25 (235)	2.00 (51)	13.50 (343)	11.15 (283)	180 (81.6)
SG-88	8 (203)	8 (203)	273 (1760)	8.93 (227)	7.00 (178)	10.28 (261)	18.75 (476)	13.42 (341)	1.00 (25)	12.25 (311)	2.00 (51)	13.50 (343)	13.50 (343)	213 (96.6)
SG-108	10 (254)	8 (203)	273 (1760)	10.93 (278)	7.00 (178)	12.78 (325)	21.25 (540)	15.92 (404)	1.00 (25)	12.25 (311)	2.00 (51)	16.00 (406)	13.50 (343)	246 (111.6)
SG-1010	10 (254)	10 (254)	538 (3474)	11.43 (290)	8.13 (207)	12.72 (323)	23.25 (591)	16.85 (428)	1.00 (25)	15.00 (381)	2.00 (51)	16.00 (406)	16.00 (406)	349 (158.3)
SG-1210	12 (305)	10 (254)	538 (3474)	13.00 (330)	8.13 (207)	15.72 (399)	26.25 (667)	19.85 (504)	1.00 (25)	15.00 (381)	2.00 (51)	19.00 (483)	16.00 (406)	390 (176.9)
SG-1212	12 (305)	12 (305)	753 (4861)	15.30 (389)	10.76 (273)	14.18 (360)	27.50 (699)	20.45 (519)	1.00 (25)	19.00 (483)	2.00 (51)	19.00 (483)	19.00 (483)	641 (290.7)
SG-1412	14 (356)	12 (305)	753 (4861)	16.00 (406)	10.76 (273)	14.18 (360)	27.50 (699)	20.45 (519)	1.00 (25)	19.00 (483)	2.00 (51)	21.00 (533)	19.00 (483)	637 (288.9)
SG-1414	14 (356)	14 (356)	997 (6433)	14.00 (356)	11.00 (279)	14.00 (356)	28.00 (711)	17.50 (445)	2.00 (51)	21.00 (533)	2.00 (51)	21.00 (533)	21.00 (533)	710 (322.0)
SG-1614	16 (406)	14 (356)	997 (6433)	14.00 (356)	12.00 (305)	15.00 (381)	27.88 (708)	17.50 (445)	2.00 (51)	21.00 (533)	2.00 (51)	23.50 (597)	21.00 (533)	750 (340.1)

Dimensions and weights are for reference only. Please allow +/- 0.25" (6mm) dimensional tolerance. Contact the factory for certified dimension prints.

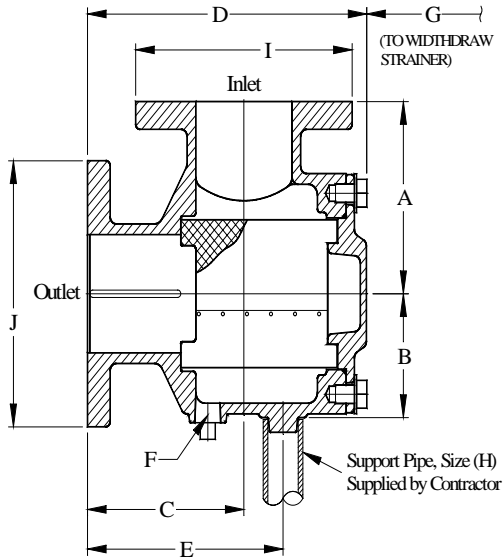

Companion flanges not included.

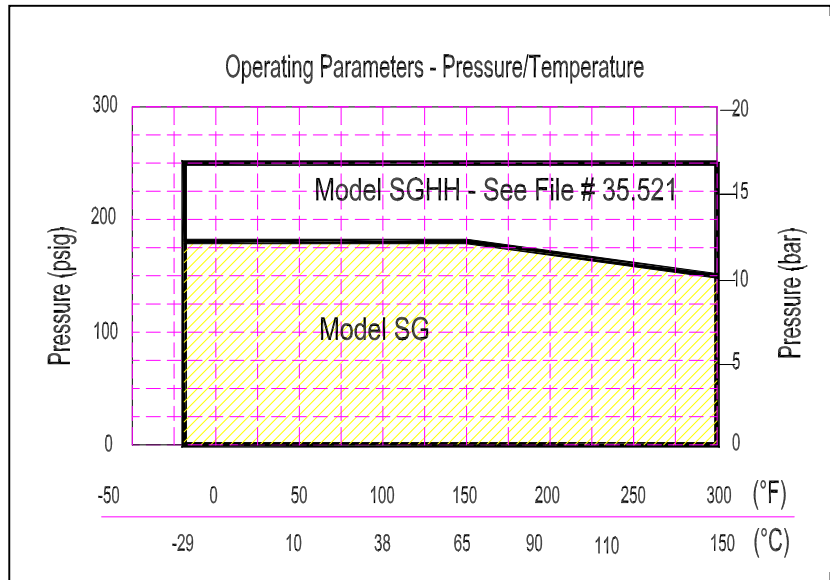

Armstrong Pumps Inc.
 93 East Avenue
 North Tonawanda, New York
 U.S.A. 14120-6594
 Tel: (716) 693-8813
 Fax: (716) 693-8970

Visit us at www.armstrongpumps.com

S.A. Armstrong Limited
 23 Bertrand Avenue
 Toronto, Ontario
 Canada, M1L 2P3
 Tel: (416) 755-2291
 Fax: (416) 759-9101



Armstrong Pumps Limited
 Peartree Road, Stanway
 Colchester, Essex
 United Kingdom, C03 5JX
 Tel: 01206-579491
 Fax: 01206-760532

Armstrong Darling
 2200 Place Transcanadienne
 Montreal, Quebec
 Canada, H9P 2X5
 Tel: (514) 421-2424
 Fax: (514) 421-2436

© S.A. Armstrong Limited 2000