

## Lochinvar Efficiency Plus Boiler

### Standard Features

- 84% Thermal Efficiency
- Two Stage Firing
- Sealed Combustion Chamber
- Stainless Steel Burners
- Low NOx Operation Exceeds the most Stringent Air Quality Requirements
- ASME Copper Finned Tube Heat Exchanger
- 160 PSI Working Pressure
- Gasketless Heat Exchanger Design
- Automatic Reset High Limit
- Loch-Heat Ceramic Tile Combustion Chamber
- Hot Surface Ignition
- ASME Pressure Relief Valve
- 24 Volt Control System
- Pump Relay
- 10 Year Limited Warranty on Heat Exchanger  
(See warranty for details)

### Available Firing Systems

- M9 Hot-Surface Ignition with Electronic Supervision (Standard)
- M13 Factory Mutual (FM)
- M14 Industrial Risk Insurers (IRI)
- M7 California Code


### Venting

- E+ Direct Aire
- Direct Vent Vertical
- Direct Vent Horizontal
- Outdoor

## EBN Model



## Efficiency Plus Performance Data

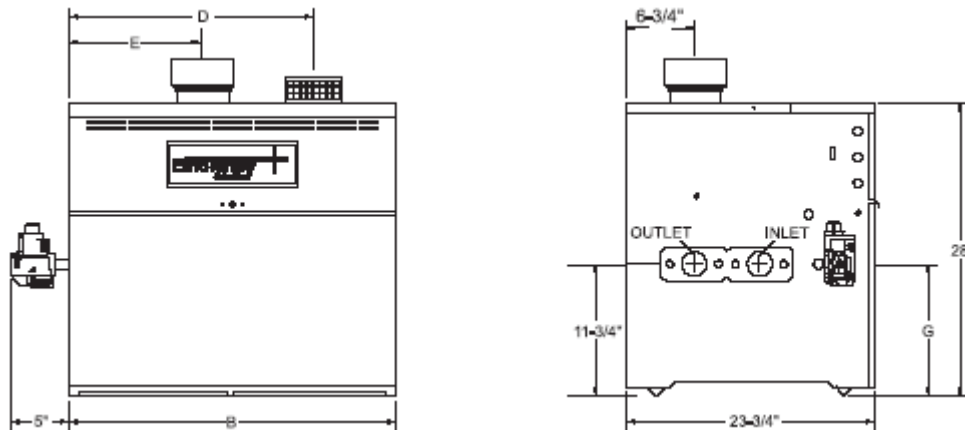

Model Number	RATINGS - Btu/Hr.						Gas Conn.	Vent Size	Shipping Weight
	INPUT	OUTPUT	B	D	E	G			
EBN150	150,000	126,000	19-3/4"	16"	7-1/4"	11-3/4"	3/4"	5"	245
EBN200	199,999	168,000	23-3/4"	20"	9-1/4"	11-3/4"	3/4"	5"	265
EBN250	250,000	210,000	27-1/2"	23-3/4"	11"	11-3/4"	3/4"	6"	290
EBN300	300,000	252,000	31-1/4"	27-1/2"	13"	11-3/4"	3/4"	6"	310